

Battery charger




Réf. 024397

CA 170 Automatic

For lead-acid batteries



35 - 170 Ah

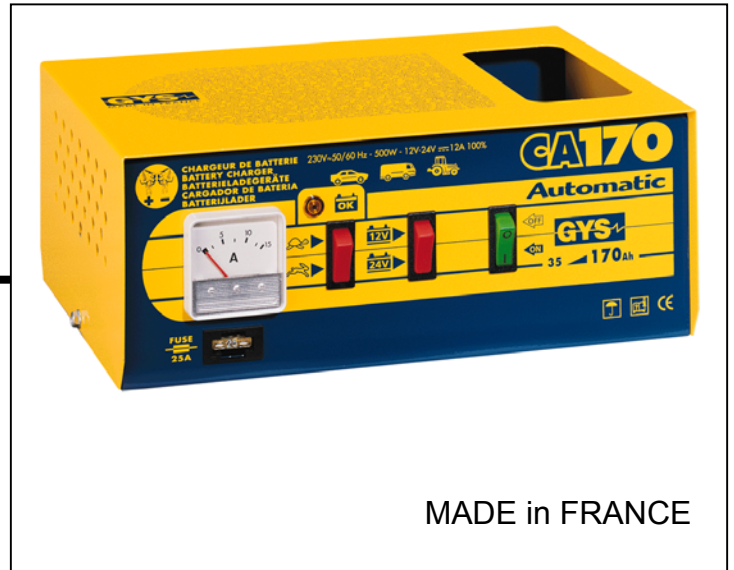


MADE in FRANCE

- Free loading surveillance by automatic switching on and off
- Protection of the electronic boards
- Allows the load of the battery without disconnecting it : To avoid losing in board parameters
- Optimum protection of the battery
- Indicator of load by ammeter
- Indicator of the end of the load thanks to a signal
- On / off switch with light indicator
- Short-circuit, overload and polarity reversal automatic protections

CE NORMES EUROPÉENNES - EUROPEAN STANDARDS
EUROPÄISCHE NORM - NORMAS EUROPEAS
EUROPESE NORM

EN 60335-2-29

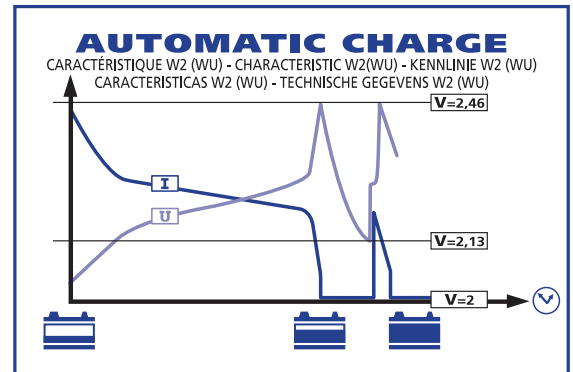

50/60 HZ V	W	Reg	CHARGE			EFFICACE/RMS A	pos. MANUAL	FUUSE A	 cm	 Kg
			MOYEN EN 60335 Reg 1	Reg 2	Reg 3					
230	500	2	7.5A	12A	18		25A*	29 x20 x11	6	

*Fuses x 10 : réf. 054516

BP 4159 – 53941 St Berthevin – LAVAL Cédex FRANCE – Fax +33 (0)2 43 68 35 21

www.gys.fr - e-mail : gys@wanadoo.fr

BB/C/FichesTech2001/07.2001