

# Battery charger



Réf. 024489

## CA 350 Automatic

For lead-acid batteries



40 - 350 Ah




MADE in FRANCE

- Free loading surveillance by automatic switching on and off
- Protection of the electronic boards
- Allows the load of the battery without disconnecting it to avoid losing in-board parameters
- Optimum protection of the battery
- 2 modes of load : « Automatic » or « Manual »
- Indicator of load by ammeter
- Indicator of the end of the load thanks to a signal
- On / off switch with light indicator
- Short-circuit, overload and polarity reversal automatic protections

CE NORMES EUROPÉENNES - EUROPEAN STANDARDS  
EUROPÄISCHE NORM - NORMAS EUROPEAS  
EUROPESE NORM

EN 60335-2-29

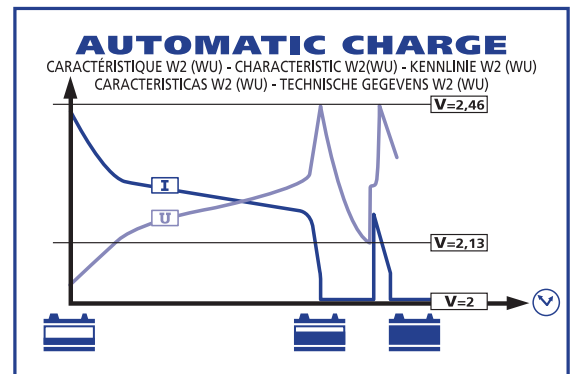

50/60 HZ V	W	Reg	CHARGE			EFFICACE/RMS A	pos. MANUAL	FUUSE A	cm	Kg
			MOYEN EN 60335							
			Reg 1	Reg 2	Reg 3					
230	1150	3	7A	15A	25A	37	•	2x25*	40 x27 x17	14

\*Fuses x 10 : réf. 054516

BP 4159 – 53941 St Berthevin – LAVAL Cédex FRANCE – Fax +33 (0)2 43 68 35 21

www.gys.fr - e-mail : gys@wanadoo.fr

BB/C/FichesTech2001/07.2001