

PSW 6042U : Ref. 027121 - Ref. 027138 
PSW 6043U : Ref. 027176 - Ref. 027183 
PSW 6047U (12V) : Ref. 027206 - Ref. 027213 

12V > 230V

Inverters - Pure Sine Wave. Dual Sockets + USB. The range of PSW inverters converts your car battery into a 230V power supply for any electrical appliance up to 1500W. The USB socket (5V) will allow you to plug in electrical appliances such as MP3 players, digital cameras...

The Pure Sine Wave output (*as opposed to Modified Sine Wave*) is a very high quality power supply suitable for high quality and sensitive electrical appliances.

Pure Sine Wave 12 V

- ✓ The power produced is either **identical or slightly better than the power from the public network.**
- ✓ Current peaks are smoothed by the Inverter which **automatically regulates** the power output.
- ✓ **Ideal for sensitive and demanding high quality equipment.**


Simple and effective

- ✓ Directly connects to the car battery.
- ✓ **Compact** and delivered with a fix points for, these items are designed to be easily carried or set up permanently in the vehicle.
- ✓ **2 connection types** for all types of electrical appliances:
 - 1 or 2 sockets (230V)
 - 1 USB connector (5V)

Safe

- ✓ Thermal protection, ventilated.
- ✓ Protection against overload and short-circuit.
- ✓ Protection against undervoltage and overvoltage.
- ✓ External protection fuse.

PSW 6042U - MAX 400W

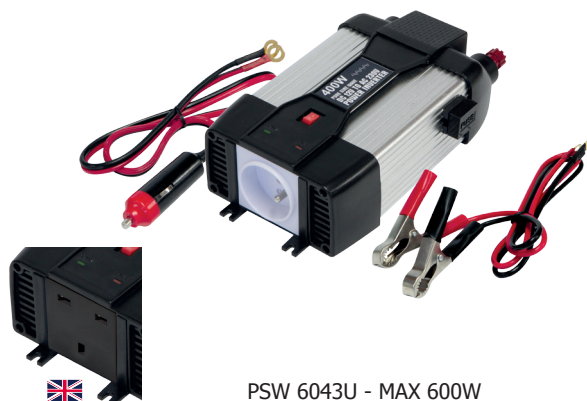






PSW 6043U - MAX 600W



PSW 6047U - MAX 1500W



	Power (W)	Peak Power (W)	Pure Sin Wave	Optimum Efficiency	Input DC	Output AC	Output USB DC				 cm	 kg
PSW 6042U	400	800	✓	85%	12V	230V	5V - 500mA	✓	✓	✓	18x18x7	1.2
PSW 6043U	600	1200	✓	85%	12V	230V	5V - 500mA	✓	✓	✓	18x20x7	2.3
PSW 6047U (12V)	1500	3000	✓	85%	12V	230V	5V - 500mA	cables	✓	✓	18x31x7	4